

Specifications

Model Number: 10-1201A
Input Voltage: 10–14v DC
Designed For: Minipure® Water Purifier
 Model MIN-1, MIN 1.5, MIN-3 and MIN-6
 and **Bio-Logic®** Model BIO-1.5 and BIO-3
Size: 3.2" x 2.2" x 1.9" (81 x 56 x 58 mm)
Weight: 13–16 oz.
Mounting: Mounting Tabs



SINCE 1963
ATLANTIC
ULTRAVIOLET
 CORPORATION®

Hauppauge, NY 11788
 (631) 273-0500
 AtlanticUltraviolet.com

70-0144

Electronic Ballast
 P/N: 10-1201A
 Input: 10v–14v DC 2A (Max.)
 For: UV 10–21W Lamp


RoHS
 COMPLIANT

Brown (+)	BALLAST	Black	LAMP
Blue (-)		White	



The information and recommendations contained in this publication are based upon data collected by the Atlantic Ultraviolet Corporation® and are believed to be correct. However, no guarantee or warranty of any kind, expressed or implied, is made with respect to the information contained herein. Specifications and information are subject to change without notice.

Connections

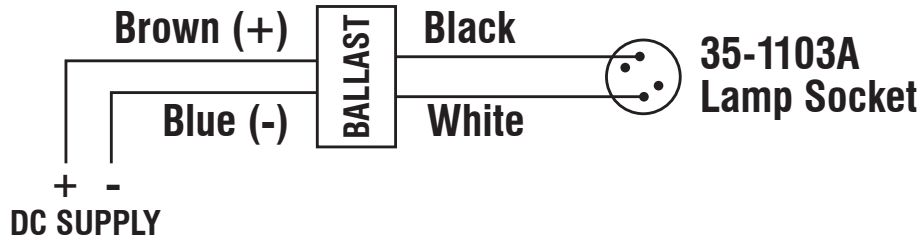


Warnings

Many individuals regard ballasts and units powered by 12 volt and 24 volt Direct Current (DC) to be relatively benign from a safety standpoint. However, a DC ballast, in order to operate an ultraviolet discharge lamp, must produce an output as high as 600 volts. This voltage is high enough to produce a very serious or even lethal electric shock. **IT IS IMPERATIVE** that all DC ballasts and DC ultraviolet units be wired and grounded appropriately.

Note Warning Labels:

WARNING: The equipment that this ballast is utilized with **MUST** be grounded in accordance with local codes and the National Electrical Code. Failure to do so may result in serious personal injury. All wiring must be done by a qualified electrician. 00-0355

Failure to ground all Direct Current (DC) ballasts and/or the equipment it is employed in can result in serious injury or death.



WARNING: Disconnect Power before servicing or relamping.